

PASS-THROUGH WAREWASHER AX-100

Pass-through glass- and dishwasher. Rack size 500 mm x 500 mm and door clearance 430 mm.



- Active Xperience: simple and intuitive use.
- √ Dedicated cycles: selection of the ideal washing programme using
- Electronic control panel with IP65 humidity protection.

You will never WASH ALONE

- Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

NCLUDES

- ✓ Peristaltic detergent pump.
- √ 1 mixed basket (plates).
- √ Rinse aid pump.
- 1 small basket for cutlery.
- 1 glasses basket.

OPTIONAL

 Overflow drainage pump. Tank water renewal by the principle

of density.

Accessories

- ☐ Tables for pass-through dishwashers
- Manual water softeners ■ Automatic water softeners
- □ 500 x 500 mm baskets
- ☐ Inserts & supplements
- Central sorting tables
- Double connection central
- sorting table
- Prewashing tables for pass-through and rack conveyor dishwashers
- Connecting tables for pass-through dishwashers and rack conveyors
- Reverse osmosis devices OS-140

Sani-Control guarantee

3-stage filtering system.

effectiveness.

SALES DESCRIPTION

Sani-Control: guaranteed disinfection.

✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.

Exclusive Hydroblade™ washing arms: maximum

√ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).

Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- √ The "monoblock" design delivers durability and resistance to im-
- 30% savings in water consumption during rinsing compared to the

3-stage filter system: surface, tank and extraction

√ Keeps the washing water in optimal conditions to maintain constant washing performance.

Designed to last

- √ "Flow" opening mechanism: allows the hood to be raised with less. effort.
- √ High load capacity 43 cm: suitable for GN 1/1 and Euronorm.
- Stainless steel surface filters for greater stability and resistance during intensive use.

Warewashing, made simple





SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm Useful height: 430 mm

Cycles: 3

Cycle duration: 120 / 180 / 210" Production baskets / hour: 30 / 24 / 17

- ✓ Boiler capacity: 8 I
- √ Wash tank capacity: 25 I
- √ Water consumption/cycle: 3 I

Energy consumption

Water consumption/cycle (kWh): 0,23 kWh Tank filling consumption (kWh): 1,07 kWh

Loading__

- ✓ Pump: 750 W / 1 Hp
- √ Tank: 2500 W
- √ Boiler: 6000 W
- √ Total loading: 6700 W

External dimensions (W x D x H)

- ✓ Width:648 mm (Wide with handle: 725 mm)
- ✓ Depth: 756 mm (Bottom with handle: 835 mm)
- ✓ Height: 2000 mm / 1508 mm

Wash temperature: 65°C



PASS-THROUGH WAREWASHER AX-100

Pass-through glass- and dishwasher. Rack size 500 mm x 500 mm and door clearance 430 mm.


Rinse temperature: 85°C Noise level (1m.): <70 dB(A)

Crated dimensions 760 x 860 x 1530 mm Gross weight: 113 kg

AVAILABLE MODELS

TVAILABLE WOODLE		
1303302	AX-100 230/50/1 DD	
1303304	Dishwasher AX-100 220/60/3 DD	
1303301	AX-100 400/50/3N DD	
1303307	AX-100B 230/50/1 DD	
1303306	AX-100B 400/50/3N DD	
1303299	AX-100 220/60/1 DD	
1303298	Dishwasher AX-100 220/60/3 DD	

^{*} Ask for special versions availability

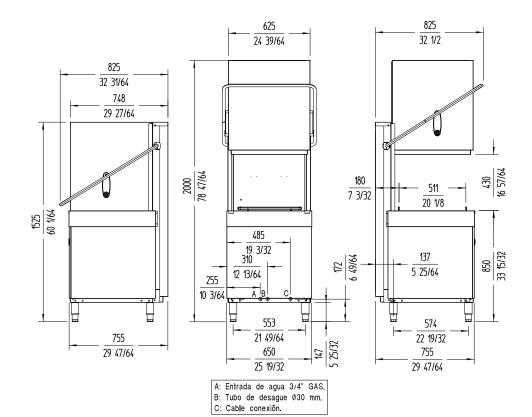



sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved