

GLASSWASHER AX-40 DD

Rack size 400 mm x 400 mm and door clearance 300 mm.



- √ The integration of the components provides greater resistance and robustness.
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal.
- √ 30 cm load capacity: high versatility for washing a wide range of glasses and even medium-sized dishes.

Warewashing, made simple

- Active Xperience: simple and intuitive use.
- ✓ Dedicated cycles: selection of the ideal washing programme using
- Electronic control panel with IP65 humidity protection.

You will never WASH ALONE

- √ Tech Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

NCLUDES

- Peristaltic detergent pump.
- √ 1 mixed basket (plates). 1 small basket for cutlery.
- ✓ Rinse aid pump.
- 1 glasses basket.

OPTIONAL

- ☐ Overflow drainage pump. Tank water renewal by the principle of density.
- Double-level accessory for washing two baskets at the same time.

Accessories

- Manual water softeners
- Automatic water softeners
- ☐ 400 x 400 mm baskets
- ☐ Inserts & supplements
- High feet kit
- □ Reverse osmosis devices OS-140
- Double rack kits for AX/UX

the ideal temperature to disinfect the dishes. **SPECIFICATIONS**

 Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.

THERMAL LOCK function: ensures that rinsing will be carried out at

GUARANTEED DISINFECTION in compliance with standard DIN

Embedded bodywork and easy-grip door: hygienic and

Exclusive Hydroblade™ washing arms: maximum

- Compact tank volume (50% water saving compared to the previous range).
- √ Embedded basket guides

New recessed bodywork

SALES DESCRIPTION

3-stage filtering system.

Sani-Control guarantee

Double-walled body (partial).

ergonomic.

10534.

effectiveness.

Sani-Control: guaranteed disinfection.

Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- √ The "monoblock" design delivers durability and resistance to impacts.
- 30% savings in water consumption during rinsing compared to the

3-stage filter system: surface, tank and extraction

- Keeps the washing water in optimal conditions to maintain constant washing performance.
- √ The surface filters feature an "easy-on" design and can be quickly. removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

Basket dimensions: 400 mm x 400 mm

Useful height: 300 mm

Cycle duration: 120 / 150 / 210" (Optional: 90 / 120 / 180") Production baskets / hour: 30 / 24 / 17 (Optional: 40 / 30 / 20)

Boiler capacity: 3.2 I Wash tank capacity: 9 I Water consumption/cycle: 2.2 I

Energy consumption

- ✓ Water consumption/cycle (kWh): 0,17 kWh
- ✓ Tank filling consumption: 0,39 kWh

Loading

- ✓ Pump: 250 W / 0.33 Hp
- √ Tank: 1200 W
- ✓ Boiler: 2500 W
- √ Total loading: 2750 W

Electrical connection: .







GLASSWASHER AX-40 DD

Rack size 400 mm x 400 mm and door clearance 300 mm.

External dimensions (W x D x H)

- √ Width:470 mm
- ✓ Depth: 537 mm
- √ Height: 710 mm

Noise level (1m.): <69 dB(A)

Crated dimensions 525 x 615 x 820 mm


AVAILABLE MODELS

1303083 AX-40 230/50/1 DD

1303090 AX-40B 230/50/1 DD

1303091 AX-40B 220/60/1 DD

* Ask for special versions availability

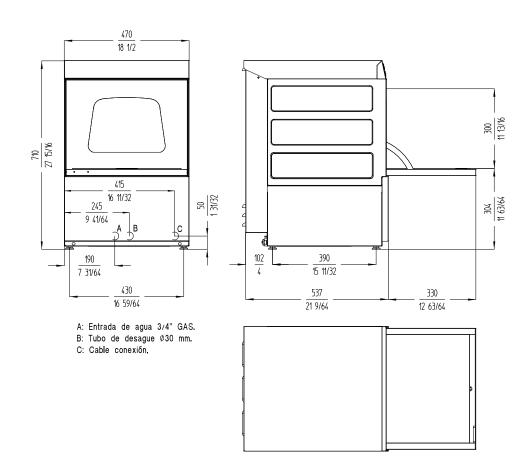



sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved