

Rack size 500 mm x 500 mm and door clearance 380 mm.





SALES DESCRIPTION

Sani-Control: guaranteed disinfection.

Embedded bodywork and easy-grip door: hygienic and ergonomic.

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Double-walled body (partial).

Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- √ THERMAL LOCK function: ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).
- Embedded basket guides.

Hydroblade™ washing arms

- \checkmark Redesigned nozzles for greater washing performance.
- √ The "monoblock" design delivers durability and resistance to impacts.
- √ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- Keeps the washing water in optimal conditions to maintain constant washing performance.
- The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

- The integration of the components provides greater resistance and robustness.
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- √ Its ergonomic handle provides a perfect grip, even with wet hands.

- Double-walled door with safety microswitch and high quality seal.
- √ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39 cm.

Warewashing, made simple

- ✓ Active Xperience: simple and intuitive use.
- Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Electronic control panel with IP65 humidity protection.

You will never WASH ALONE

- √ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

NCLUDES

- ✓ Peristaltic detergent pump.
- Rinse aid pump.
- √ 1 glasses basket.
- √ 1 mixed basket (plates).
- 1 small basket for cutlery.

OPTIONAL

- Overflow drainage pump. Tank water renewal by the principle of density.
- Double-level accessory for washing two baskets at the same time.

Accessories

- Manual water softeners
- Automatic water softeners
- ☐ 500 x 500 mm baskets
- ☐ Inserts & supplements
- ☐ High feet kit
- □ Reverse osmosis devices OS-140
- Double rack kits for AX/UX

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Useful height: 380 mm

Cycle duration: 120" / 150" / 210" Production baskets / hour: 30 / 24 / 17Wash temperature: 55° C - 65° C Rinse temperature: 75° C - 85° C

√ Boiler capacity: 4.5 I







WAREWASHER AX-50 (13 AMP) DD

Rack size 500 mm x 500 mm and door clearance 380 mm.

✓ Wash tank capacity: 14 I✓ Water consumption/cycle: 2.7 I

Energy consumption

__Consumption/cycle (kWh): 0,21 kWh
Tank filling consumption (kWh): 0,6 kWh

Loading_

Pump: 500 W / 0.75 Hp

Tank: 1800 W Boiler: 2500 W Total loading: 3000 W

External dimensions (W x D x H)

√ Width:580 mm

✓ Depth: 635 mm

✓ Height: 835 mm

Noise level (1m.): <70 dB(A)

Crated dimensions


640 x 695 x 960 mm

AVAILABLE MODELS

1303182 AX-50 230/50/1 DD 1303187 AX-50B 230/50/1 DD

1303188 AX-50B 220/60/1 DD

* Ask for special versions availability

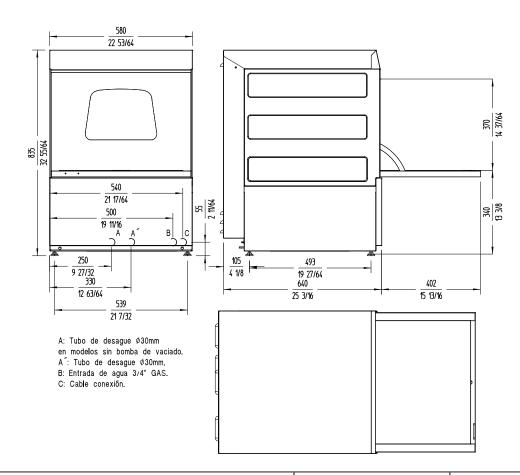



sammic.co.uk

Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project Dat	e
Item Qty	,

Approved