



POTATO PEELER PP-12+

Output: 12 kg per cycle.



- ✓ Width with stand: 411 mm
 - ✓ Depth with stand: 700 mm
 - ✓ Height with stand: 1090 mm
- Net weight: 38 kg

Noise level (1m.): 70 dB(A)

Background noise: 32 dB(A)

AVAILABLE MODELS

1000420 Potato peeler PP-12+ 230-400/50/3 · 370 W

1000421 Potato peeler PP-12+ 230/50/1 · 400 W

1000422 Potato peeler PP-12+ 220-380/60/3

1000423 Potato peeler PP-12+ 220/60/1

1000426 Potato peeler PP-12+ 440/60/3

1000427 Potato peeler PP-12+ 120/60/1

* Ask for special versions availability

SALES DESCRIPTION

Aluminium made potato peeler.

Aluminium body potato peeler. Abrasive peeling. The abrasive is highly resistant and long lasting.

- ✓ Base Plate and chamber walls lined with abrasive.
- ✓ Aluminium body.
- ✓ Directable cylinder.
- ✓ Integral control panel complete with on/off push buttons and a 0-6 minute timer.

OPTIONAL

- ☐ Stainless steel floor stand.
- ☐ Water inlet kit (2003971).
- ☐ Filter with no-foam feature.

ACCESSORIES

- ☐ Stands for potato peelers PP / PPC
- ☐ Filters for potato peelers PP / PPC

SPECIFICATIONS

Hourly production: 220 kg / 300 kg

Capacity per load: 12 kg

Timer (min-max): 0' - 6'

Plate speed: 317 rpm

Total loading: 400 W (1~) / 370 W (3~)

External dimensions (W x D x H)

- ✓ Width: 395 mm
- ✓ Depth: 700 mm
- ✓ Height: 517 mm

External dimensions with stand






POTATO PEELER PP-12+

Output: 12 kg per cycle.



DYNAMIC PREPARATION
COMMERCIAL POTATO PEELERS

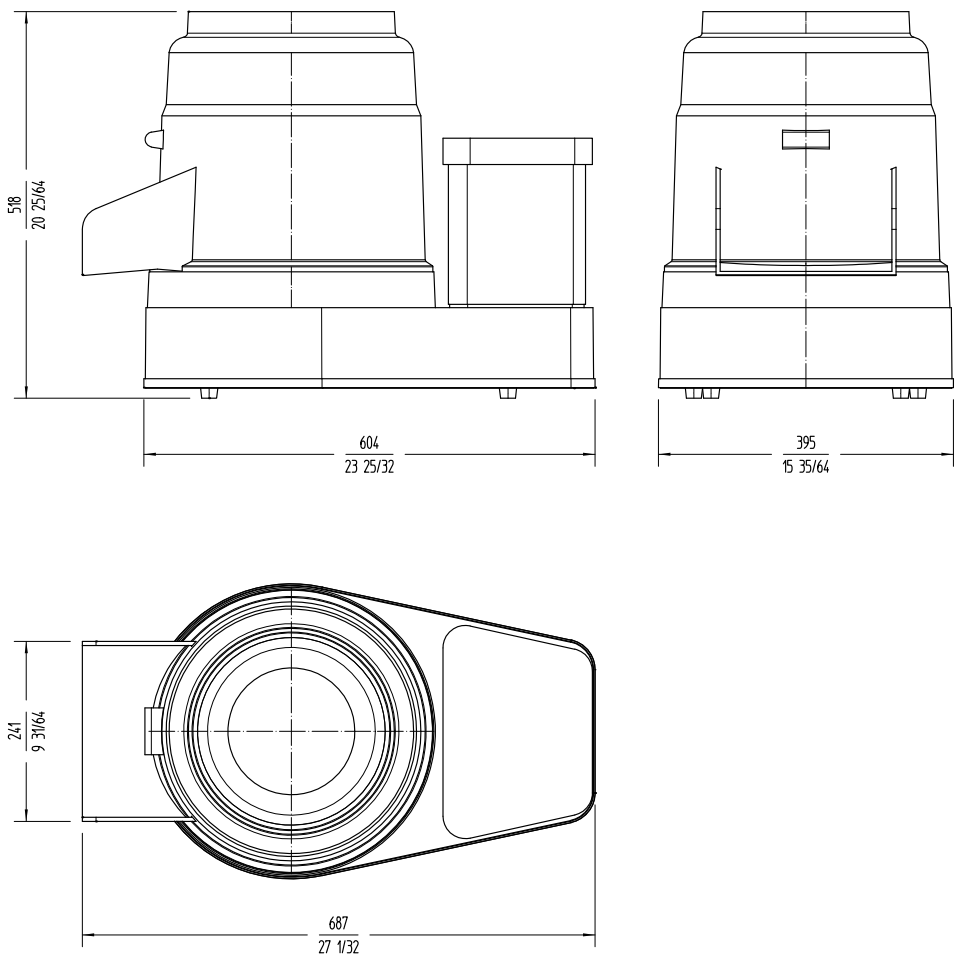

sammic.co.uk
Food Service Equipment Manufacturer
Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 22/05/2025