



POTATO PEELER PPC-6+

Output: 6 kg per cycle. Equipped with attachment drive to power accessories.



Plate speed: 317 rpm

Total loading: 550 W (1~) / 550 W (3~)

External dimensions (W x D x H)

✓ Width: 395 mm

✓ Depth: 700 mm

✓ Height: 447 mm

External dimensions with stand

✓ Width with stand: 411 mm

✓ Depth with stand: 700 mm

✓ Height with stand: 1020 mm

Net weight: 37 kg

Noise level (1m.): 70 dB(A)

Background noise: 32 dB(A)

AVAILABLE MODELS

1000430 Potato peeler PPC-6+ 230-400/50/3 · 550 W

1000431 Potato peeler PPC-6+ 230/50/1 · 550 W

1000434 Potato peeler PPC-6+ 220/60/1

* Ask for special versions availability

SALES DESCRIPTION

Aluminium made potato peeler.

Aluminium body potato peeler. Abrasive peeling. The abrasive is highly resistant and long lasting.

- ✓ Base plate and chamber walls lined with abrasive.
- ✓ Aluminium body.
- ✓ Directable cylinder.
- ✓ Integral control panel complete with on/off push buttons and a 0-6 minute timer.

INCLUDES

- ✓ Attachment drive to power accessories.

OPTIONAL

- ☐ Stainless steel floor stand.
- ☐ Filter with no-foam feature.
- ☐ Vegetable preparation attachment CR-143.
- ☐ Potato masher attachment P-132.
- ☐ Meat mincer attachment HM-71.
- ☐ Water inlet kit (2003971).

ACCESSORIES

- ☐ Vegetable preparation attachment CR-143
- ☐ Meat mincer attachment HM-71
- ☐ Potato masher attachment P-132
- ☐ Stands for potato peelers PP / PPC
- ☐ Filters for potato peelers PP / PPC

SPECIFICATIONS

Hourly production: 120 kg / 150 kg

Capacity per load: 6 kg

Timer (min-max): 0' - 6'






POTATO PEELER PPC-6+

Output: 6 kg per cycle. Equipped with attachment drive to power accessories.



DYNAMIC PREPARATION
COMMERCIAL POTATO PEELERS

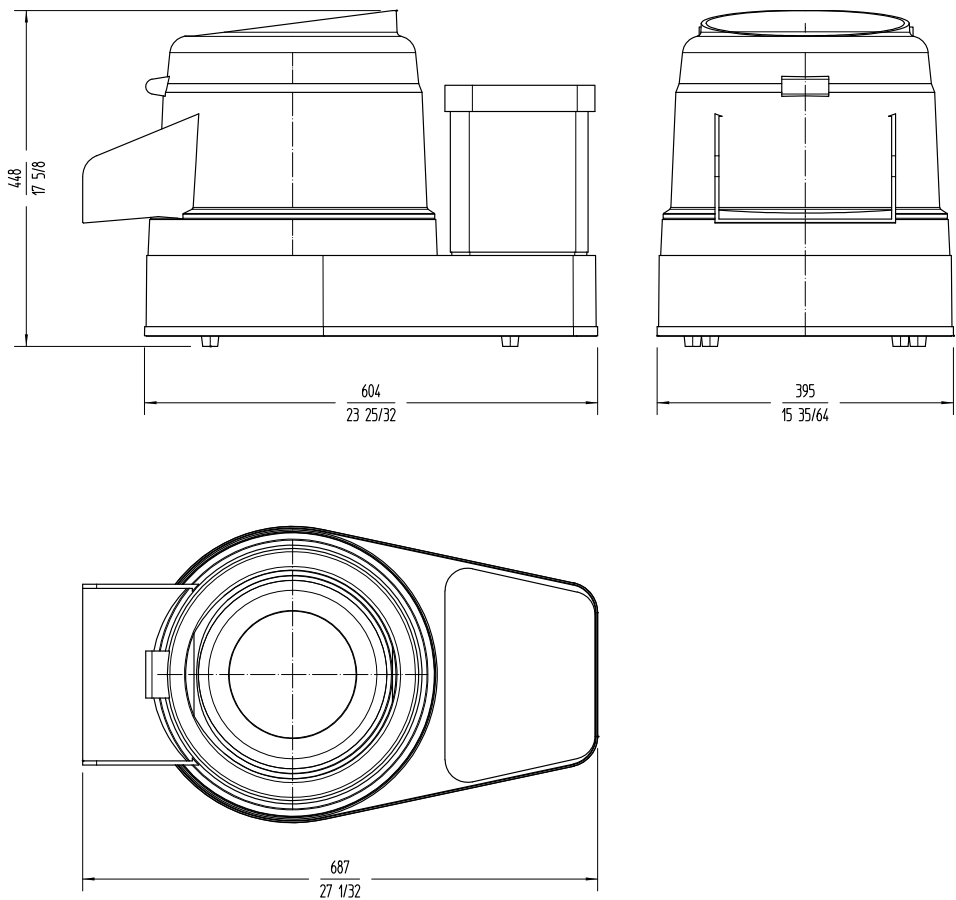

 sammic www.sammic.com Food Service Equipment Manufacturer Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com 	Project	Date
	Item	Qty
	Approved	

product sheet
updated 10/12/2024