



VACUUM SEALER SU-806LL

Floorstanding unit. 63 m³/h . 848 + 848 mm.



FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES



SALES DESCRIPTION

Two sealing bars 848 + 848 mm.
63 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Inert gas.
- ☐ Printer.
- ☐ Vacuum packing bags.
- ☐ External vacuum kit for Vac-Norm, containers and accessories.
- ☐ Bag cutting kit.
- ☐ Support for liquid packaging.
- ☐ Additional filling plates.

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 63 m³/h
Pump capacity (60 Hz): 75 m³/h
Bar length: 848 mm
Total loading: 1500 W
Vacuum pressure (maximum): 0.5 mbar

Internal dimensions

- ✓ Width: 864 mm
- ✓ Depth: 603 mm
- ✓ Height: 215 mm

External dimensions (W x D x H)

- ✓ Width: 960 mm
- ✓ Depth: 757 mm
- ✓ Height: 998 mm (230V) / (120V)

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions
840 x 1060 x 1200 mm

AVAILABLE MODELS

1140896 SU-806P LL 230-400/50/3N

1140897 SU-806GP LL 230-400/50/3N

1140911 SU-806 LL 208-240/60/3

1140913 SU-806G LL 208-240/60/3

1140914 SU-806P LL 208-240/60/3

1140915 SU-806GP LL 208-240/60/3

1140933 SU-806GP LL 220/60/3

1140898 SU-806GP LL 230/50/1

* Ask for special versions availability






VACUUM SEALER SU-806LL

Floorstanding unit. 63 m³/h . 848 + 848 mm.



FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES

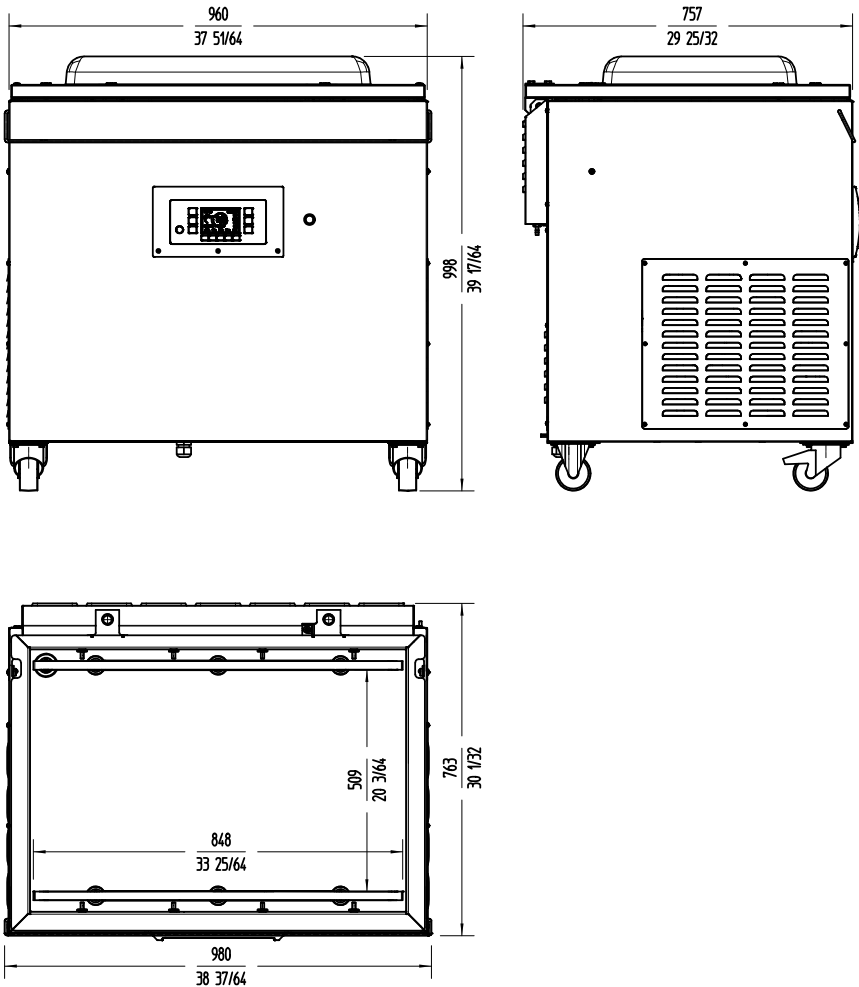

www.sammic.co.uk
Food Service Equipment Manufacturer
Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 28/10/2024