



# VACUUM SEALER SU-810LL

Floorstanding unit. 100 m³/h . 848 + 848 mm.



## SALES DESCRIPTION

Two sealing bars 848 + 848 mm.  
100 m³/h Busch vacuum pump.  
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

## INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

## OPTIONAL

- ☐ Inert gas.
- ☐ Sealing plus.
- ☐ Printer.
- ☐ Vacuum packing bags.
- ☐ External vacuum kit for
- Vac-Norm, containers and accessories.
- ☐ Bag cutting kit.
- ☐ Support for liquid packaging.
- ☐ Additional filling plates.

## ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum
- packing
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

## SPECIFICATIONS

Pump capacity: 100 m³/h  
Pump capacity (60 Hz): 120 m³/h  
Bar length: 848 mm  
Total loading: 2200 W  
Vacuum pressure (maximum): 0.5 mbar

### Internal dimensions

- ✓ Width: 864 mm
- ✓ Depth: 603 mm
- ✓ Height: 215 mm

### External dimensions (W x D x H)

- ✓ Width: 960 mm
- ✓ Depth: 757 mm
- ✓ Height: 998 mm (230V) / (120V)

Noise level (1m.): 75 dB(A)  
Background noise: 32 dB(A)

Crated dimensions  
840 x 1060 x 1200 mm



# VACUUM SEALER SU-810LL


Floorstanding unit. 100 m³/h . 848 + 848 mm.



## AVAILABLE MODELS

|         |                           |
|---------|---------------------------|
| 1140958 | SU-810P LL 400/50-60/3N   |
| 1140960 | SU-810P+ LL 400/50-60/3N  |
| 1140961 | SU-810GP LL 400/50-60/3N  |
| 1140963 | SU-810GP+ LL 400/50-60/3N |
| 1140988 | SU-810P LL 208-240/60/3   |
| 1140990 | SU-810P+ LL 208-240/60/3  |
| 1140991 | SU-810GP LL 208-240/60/3  |
| 1140993 | SU-810GP+ LL 208-240/60/3 |

\* Ask for special versions availability

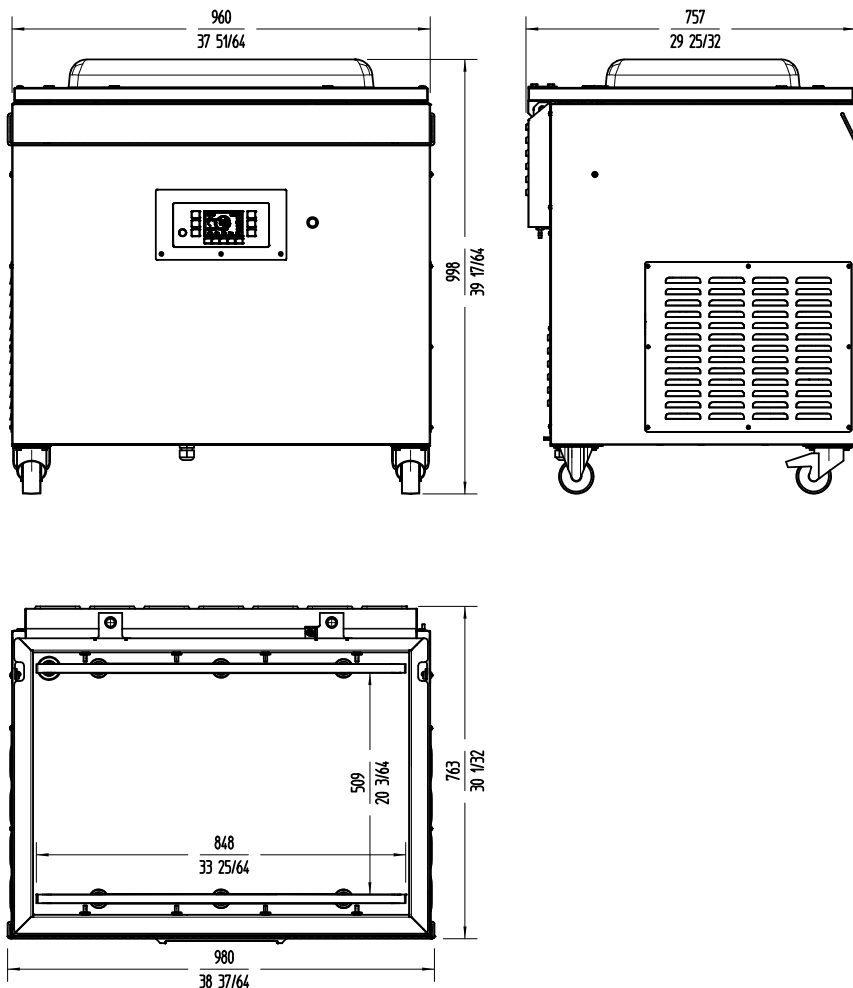

**www.sammic.co.uk**  
Food Service Equipment Manufacturer  
Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester  
[uksales@sammic.com](mailto:uksales@sammic.com)  
Tel.: +44 0116 246 1900



|          |      |
|----------|------|
| Project  | Date |
| Item     | Qty  |
| Approved |      |

product sheet  
updated 28/10/2024

FOOD PRESERVATION AND SOUS-VIDE  
COMMERCIAL VACUUM PACKING MACHINES