TURBO LIQUIDISER TRX-21

1-speed turbo-mixer.





Turbo-blender designed to work in up to 800 I / 130 gal

Designed for large yields and for frequent use and cleaning.

Mix and liquefy directly in the pot or pan for making consommés,

√ Ideal for kitchens with large production capacities and for food

√ 42D attachment for very fine blending.

Guaranteed safety

- The safety micro switch controls work position and prevents the turbine from working if the arm is too high or low.
- The wiring is incorporated into the trolley tubes, so the work area is free of cables and does not hinder the movement of the blender arm.
- Supports for storing the power supply cable prevent it from getting caught or tangled during storage.

NCLUDES

√ Trolley, motor and arm (without)

attachments).

OPTIONAL

- 21D attachment for fibrous ingredients.
- ☐ Standard 30D attachment for
- general use.
- 42D attachment for very fine blending.

Accessories

☐ Grids for TRX

SPECIFICATIONS

Maximum recipient capacity: 800 I

Liquidising arm length: 600 mm Max. grid diameter: 288 mm

Total loading: 2200 W

Speed (in liquid): 1500 rpm

External dimensions (W x D x H)

√ Width: 568 mm

✓ Depth: 1643 mm (963 mm)

√ Height: 1219 mm (1651 mm)

Net weight: 96 kg

Noise level (1m.): <70 dB(A) Background noise: 32 dB(A)

Crated dimensions 1030 x 710 x 1840 mm

Sturdy construction

- √ Fully manufactured in 18/10 stainless steel.
- ✓ Designed for large yields.

SALES DESCRIPTION

Ideal for big production needs

soups, omelettes, mayonnaise, etc.

bowls.

industry.

√ 1-speed model.

- √ Allow working in containers of up to 800 I / 130 gal.
- \checkmark 24" long arm for blending in any type of cooking pot.
- ✓ 0-60 min built-in timer.

Easy and convenient handling

- √ They can be moved in several directions and are height-adjustable.
- The machine is fitted on a trolley with 4 non-slip rubber wheels, 2 of them with brakes.
- The balanced liquidiser arm stops the arm when falling or tipping back when not locked.
- An arm securing lever, located on the trolley, allows you to lock the blender with one hand while holding the trolley with the other.
- The watertight, tilted control panel is easily accessible even during use.
- Their built-in timer allows leaving the machine running for up to 60 minutes without the need for user involvement.

Versatility, thanks to 3 types of interchangeable grids

- √ 21D attachment for fibrous ingredients.
- Standard 30D multi-use attachment.

AVAILABLE MODELS

3030501 Turbo liquidiser TRX-21 230-400/50/3N

3030502 Turbo liquidiser TRX-21 220-380/60/3N

3030509 Turbo liquidiser TRX-21 230-400/50/3N (by air)

3030511 Turbo liquidiser TRX-21 220-380/60/3N (by air)

* Ask for special versions availability




















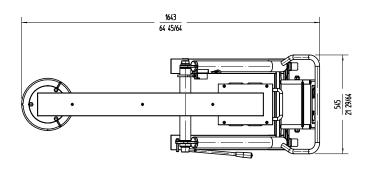

Sammic | www.sammic.com
Food Service Equiment Manufacturer

Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty

Approved