

PASS-THROUGH DISHWASHER UX-130BC DD

Rack size 500 mm x 500 mm and door clearance 430 mm.



SALES DESCRIPTION

- Top panel.
- Sani-Control: guaranteed disinfection.
- Exclusive Hydroblade™ washing arms: maximum effectiveness.
- 3-stage filtering system.

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- √ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disin-
- √ The PRESSURE PUMP guarantees effective high-pressure rinsing
- √ WRAS certified.

New recessed bodywork

- Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- √ Compact tank volume (50% water saving compared to the previous) range).

Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- √ The "monoblock" design delivers durability and resistance to impacts.
- 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

Keeps the washing water in optimal conditions to maintain constant washing performance.

Designed to last



- "Flow" opening mechanism: allows the hood to be raised with less effort
- √ High load capacity 43 cm: suitable for GN 1/1 and Euronorm
- ✓ Stainless steel surface filters for greater stability and resistance during intensive use

Premium warewashing

- Soft start: progressive start-up of the washing pump to protect fragile items.
- Top panel: it allows quick and intuitive reading of information, ideal for corner installations.
- Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- Dedicated cycles: selection of the ideal washing programme using
- Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- √ TEMPERATURE DISPLAY
- √ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- Control panel with IP65 humidity protection.

You will never WASH ALONE

- √ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- 60 years of experience and know-how at your disposal.

NCLUDES

- ✓ Peristaltic detergent pump.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.
- ✓ Type-A air break.WRAS appro-
- ved break tank.
- Rinse aid pump.
- 1 glasses basket.
- 1 mixed basket (plates).
- 1 cutlery basket.

Accessories

- ☐ Tables for pass-through dishwashers
- Manual water softeners
- Automatic water softeners
- □ 500 x 500 mm baskets
- □ Inserts & supplements
- Central sorting tables
- Double connection central sorting table
- Prewashing tables for pass-through and rack convevor dishwashers
- Connecting tables for pass-through dishwashers and rack conveyors
- □ Reverse osmosis devices OS-140
- ☐ Dosing equipments for AX / UX hood-type dishwashers

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm Useful height: 430 mm

Cycles: 6

Cycle duration: 60 / 90 / 100 / 150 / 210" Production baskets / hour: 60 / 40 / 36 / 24 / 17

Boiler capacity: 12 I Wash tank capacity: 25 I

Consumption and savings

- √ Water consumption/cycle: 2.8 I
- ✓ Automatic saving mode in: 25'



PASS-THROUGH DISHWASHER UX-130BC DD

Rack size 500 mm x 500 mm and door clearance 430 mm.

✓ Automatic switch-off: 120'

Energy consumption

Loading_

✓ Pump: 1000 W / 1.3 Hp

√ Tank: 3000 W

✓ Boiler: 9000 W

√ Total loading: 10000 W

External dimensions (W x D x H)

√ Width:650 mm (Wide with handle: 725 mm)

✓ Depth: 755 mm (Bottom with handle: 835 mm)

√ Height: 2070 mm / 1600 mm


Wash temperature: 71°C Rinse temperature: 87°C Noise level (1m.): <70 dB(A)


Crated dimensions 760 x 860 x 1630 mm Gross weight: 133 kg


AVAILABLE MODELS

1303430 UX-130BC 400/50/3N DD

* Ask for special versions availability

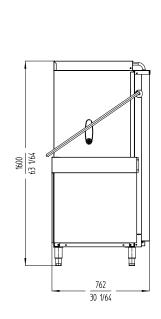

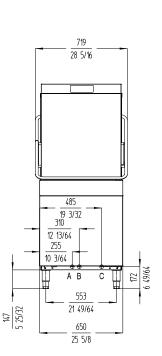

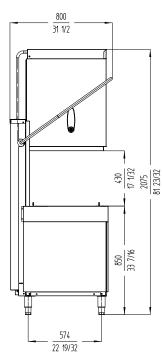

- A: Entrada de agua 3/4" GAS B: Tuboi de desague
- C: Cable conexión

sammic	sammic.com
Food Service Equiment Manufacturer	

Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty

Approved