

# IMMERSION CIRCULATOR SMARTVIDE XL

Maximum capacity: 120 I / 30 gal.



### SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable.

Interchangeable between °C and °F.

- Bluetooth / WIFI connectivity.
- ✓ HACCP-ready.

 Optional core probe and temperature control by core probe.

- Firmware update.
- ✓ 5" colour touch screen.

### Sous-vide cooking, a technique with many advantages

- ✓ SmartVide guarantees cooking at a precisely controlled temperature while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- ✓ The **optional core probe** allows for an even more precise control when standardizing recipes. Recipes can be set and the SmartVide controlled by the core probe temperature.
- Allows cooking food in their own juice and using this juice immediately after cooking to enhance flavors.
- ✓ Marinates and macerates an ingredient in half the time. ✓ Infuses and flavors oil, fat or other products applying the
- controlled temperature technique.
- ✓ The possibility of probe activated cycle start is a crucial function for pasteurization.
- ✓ Increases profits due to lack of product shrink
- ✓ The possibility of connecting SmartVide X to an enhanced tank reduces heating time. This function is specially useful when cooking or retherming very cold or frozen food.

#### SmartVide XL: designed for chefs, developed with chefs

The thick stainless steel, robust construction guarantees commercial performance.



- ✓ Requires very little hands-on time, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest.
- ✓ The interactive full-color touchscreen offers all information at a glance and makes operation extremely intuitive. In addition, thanks to the connectivity, an exchange of important data is allowed to improve the performance of the Chef.
- SmartVide XL offers a complete settings menu, accessible through its touch screen.
- Portable: thanks to their thick, stainless steel, ergonomic handle, SmartVide can be taken from a container to another easily. Additionally, the bag supplied with the circulator allows easy transport - wherever the Chef goes.
- HACCP-ready: thanks to Bluetooth connectivity, it is possible to export or print cooking results at the end of each cycle. Furthermore, the cooking data be consulted on the interactive touch screen at any time during the cycle.
- V Your appliance, always updated: free firmware update, no matter where the appliance is with no need of additional appliances.

High production retherming and cooking station

SmartVide XL cooker + 120P heated tank

### High production: serve up to 200 portions of 200 g per hour.

Designed to help foodservice professionals with productivity, menu versatility and culinary quality. Serve up to 200 portions of 200 g per hour while maintaining the same precision as a typical countertop sous vide tank.

[link:landing:174/]

**NCLUDES** 

✓ Janby Track Mini (must be

activated).

ipdated **11/06/2025** product shee



# **IMMERSION CIRCULATOR SMARTVIDE XL**

Maximum capacity: 120 I / 30 gal.

Range: 5°C - 95°C

**General features** 

Total loading: 2600 W

Net weight: 4,65 kg

Cycle duration: 1' - 99 h

Maximum recipient capacity: 120 I

AVAILABLE MODELS

Resolution: 1'

Time

# **OPTIONAL**

- Core probe.
- Insulated tanks.
- Heated tanks.

### **Accessories**

- Needle probe for sous-vide cookers
- Probe foam seal
- Insulated tank for SmartVide immersion circulator

### **Specifications**

Temperature

Display precision: 0.01°C

Lid for SmartVide tanks

Lids for insulated tanks.

□ Janby Track (available through

Floating balls.

janby,kitchen).

□ Floating balls for SmartVide Heated tanks for SmartVide X

125

4 59/64

- Heated tanks for SmartVide XL
- Baskets for 120P heated tank
  - 1180402 SmartVide XL 208-240/50-60/1 1180400
    - SmartVide XL 230/50-60/1 AUS 1180406


SmartVide XL 230/50-60/1


Permissible ambient temperature: 5°C - 40°C

Submergible part dimensions: 117 mm x 110 mm x 197 mm

External dimensions (W x D x H): 125 mm x 148 mm x 435 mm

\* Ask for special versions availability

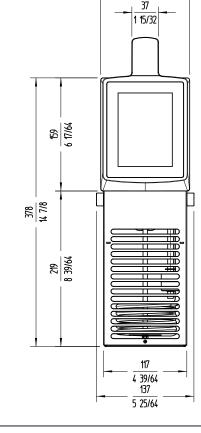

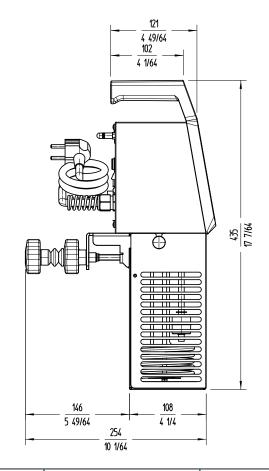



## sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park I F4 9I S - Leicester uksales@sammic.com

Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

Indated 11/06/2025

product sheet