



IMMERSION CIRCULATOR SMARTVIDE XL

Maximum capacity: 120 l / 30 gal.



- ✓ Requires **very little hands-on time**, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest.
- ✓ The interactive full-color touchscreen offers **all information at a glance** and makes operation extremely intuitive. In addition, thanks to the connectivity, an exchange of important data is allowed to improve the performance of the Chef.
- ✓ SmartVide XL offers a complete **settings menu**, accessible through its touch screen.
- ✓ **Portable**: thanks to their thick, stainless steel, ergonomic handle, SmartVide can be taken from a container to another easily. Additionally, the bag supplied with the circulator allows easy transport - wherever the Chef goes.
- ✓ **HACCP-ready**: thanks to Bluetooth connectivity, it is possible to export or print cooking results at the end of each cycle. Furthermore, the cooking data be consulted on the interactive touch screen at any time during the cycle.
- ✓ **Your appliance, always updated**: free firmware update, no matter where the appliance is with no need of additional appliances.

High production retherming and cooking station

SmartVide XL cooker + 120P heated tank

High production: serve up to 200 portions of 200 g per hour.

Designed to help foodservice professionals with productivity, menu versatility and culinary quality. Serve up to 200 portions of 200 g per hour while maintaining the same precision as a typical countertop sous vide tank.

[link:landing:174/]

SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable.

Interchangeable between °C and °F.

- ✓ Bluetooth / WIFI connectivity.
- ✓ HACCP-ready.
- ✓ Optional core probe and temperature control by core probe.
- ✓ Firmware update.
- ✓ 5" colour touch screen.

Sous-vide cooking, a technique with many advantages

- ✓ SmartVide guarantees cooking at a **precisely controlled temperature** while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- ✓ The **optional core probe** allows for an even more precise control when standardizing recipes. Recipes can be set and the SmartVide controlled by the core probe temperature.
- ✓ Allows cooking food in their own juice and using this juice immediately after cooking to **enhance flavors**.
- ✓ Marinates and macerates an ingredient in **half the time**.
- ✓ **Infuses and flavors** oil, fat or other products applying the controlled temperature technique.
- ✓ The possibility of probe activated cycle start is a crucial function for **pasteurization**.
- ✓ Increases **profits** due to lack of product shrink
- ✓ The possibility of connecting SmartVide X to an **enhanced tank** reduces heating time. This function is specially useful when cooking or retherming very cold or frozen food.

SmartVide XL: designed for chefs, developed with chefs

- ✓ The thick stainless steel, robust construction guarantees commercial performance.

INCLUDES

- ✓ Janby Track Mini (must be activated).

OPTIONAL

- | | |
|---|---|
| <input type="checkbox"/> Core probe. | <input type="checkbox"/> Lids for insulated tanks. |
| <input type="checkbox"/> Insulated tanks. | <input type="checkbox"/> Floating balls. |
| <input type="checkbox"/> Heated tanks. | <input type="checkbox"/> Janby Track (available through janby,kitchen). |

ACCESSORIES

- | | |
|--|--|
| <input type="checkbox"/> Needle probe for sous-vide cookers | <input type="checkbox"/> Lid for SmartVide tanks |
| <input type="checkbox"/> Probe foam seal | <input type="checkbox"/> Floating balls for SmartVide |
| <input type="checkbox"/> Insulated tank for SmartVide immersion circulator | <input type="checkbox"/> Heated tanks for SmartVide X |
| | <input type="checkbox"/> Heated tanks for SmartVide XL |
| | <input type="checkbox"/> Baskets for 120P heated tank |

SPECIFICATIONS

Temperature

Display precision: 0.01°C

Range: 5°C - 95°C

Permissible ambient temperature: 5°C - 40°C

Time

Resolution: 1'

Cycle duration: 1' - 99 h

General features

Maximum recipient capacity: 120 l

Total loading: 2600 W



IMMERSION CIRCULATOR SMARTVIDE XL

Maximum capacity: 120 l / 30 gal.




Submersible part dimensions: 117 mm x 110 mm x 197 mm
External dimensions (W x D x H): 125 mm x 148 mm x 435 mm
Net weight: 4,65 kg

AVAILABLE MODELS

1180402	SmartVide XL 208-240/50-60/1
1180400	SmartVide XL 230/50-60/1
1180406	SmartVide XL 230/50-60/1 AUS

* Ask for special versions availability

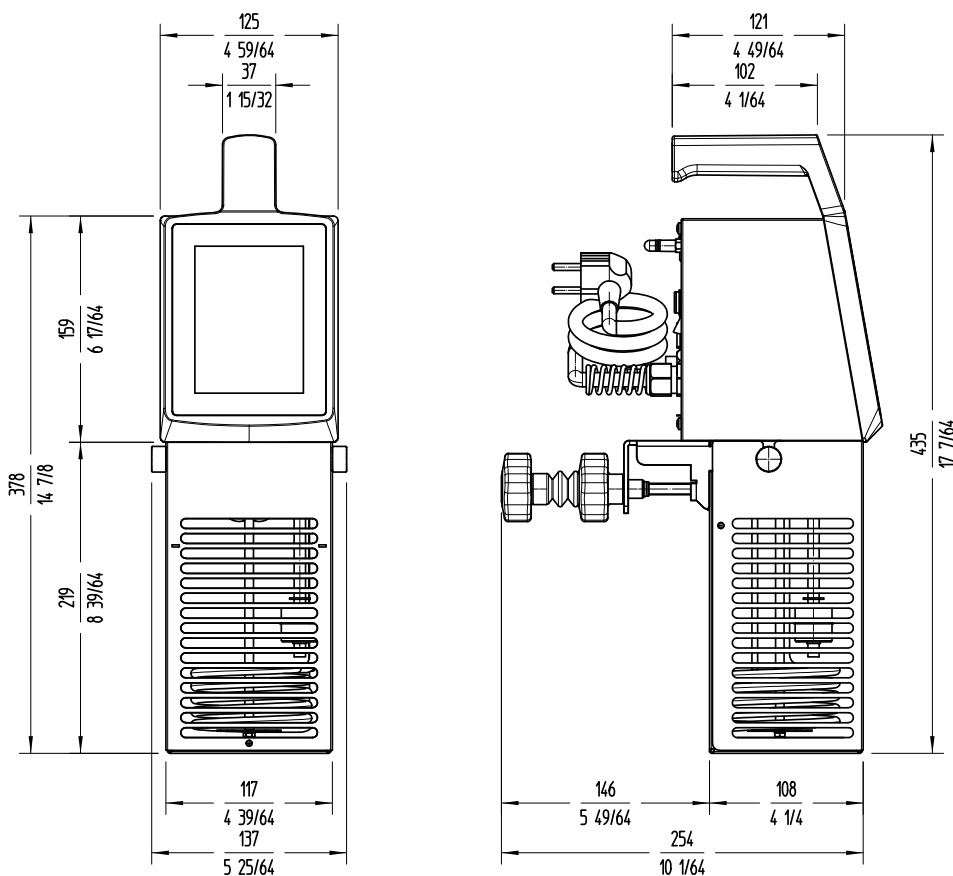

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36
20720 Azkoitia, Spain sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet
updated 07/03/2025