



## DISHWASHER UX-50C

Rack size 500x500mm and door clearance 380 mm. Constant temperature rinsing system. Power configurable to 13/16/20/25amp



WARE WASHING  
COMMERCIAL UNDERCOUNTER DREWASHERS



### SALES DESCRIPTION

Sani-Control: guaranteed disinfection  
Embedded bodywork and easy-grip door: hygienic and ergonomic  
Exclusive Hydroblade™ washing arms: maximum effectiveness.  
3-stage filtering system.  
Double-walled body (partial).

#### Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing
- ✓ WRAS certified.

#### New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides

#### Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

#### 3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.

- ✓ The surface filters feature an “easy-on” design and can be quickly removed without having to disconnect the washing arms.

#### “Easy grip” door: new design with integrated door handle

- ✓ The integration of the components provides greater resistance and robustness.
- ✓ Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- ✓ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39.

#### Premium warewashing

- ✓ Ultra Xperience: high performance, without complications.
- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

#### You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

### INCLUDES

- ✓ Detergent Dispenser.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.
- ✓ Rinse aid pump.
- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 small basket for cutlery.

### OPTIONAL

- ☐ Automatic resin regeneration water softener with salt detector.
- ☐ Double-level accessory for washing two baskets at the same time.

### ACCESSORIES

- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ 500 x 500 mm baskets
- ☐ Inserts & supplements
- ☐ High feet kit
- ☐ Reverse osmosis devices OS-140
- ☐ Stands for dishwashers 500x500mm
- ☐ Double rack kits for AX/UX

### SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Useful height: 380 mm

Cycle duration: 90/110/120/180/240”

Production baskets / hour: 40/33/30/20/15

Wash temperature: 55°C - 65°C

Rinse temperature: 65°C - 87°C

Boiler capacity: 8 l

Wash tank capacity: 14 l





## DISHWASHER UX-50C

Rack size 500x500mm and door clearance 380 mm. Constant temperature rinsing system. Power configurable to 13/16/20/25amp



WARE WASHING  
COMMERCIAL UNDERCOUNTER WAREWASHERS

### Consumption and savings

Water consumption/cycle: 2.5 l  
Automatic saving mode in: 25'  
Automatic switch-off: 120'

### Loading

Pump: 750 W / 1 Hp  
Tank: 1800 W

Total loading: 5750 W (3-phase) / 5750 / 4550 / 2750 W (multipower)

### External dimensions (W x D x H)

- ✓ Width: 580 mm
- ✓ Depth: 635 mm
- ✓ Height: 835 mm


### Crated dimensions

640 x 695 x 960 mm

### AVAILABLE MODELS

1303242	UX-50BC 230/50/1 DD
1303243	UX-50BC 400/50/3N DD
1303244	UX-50BC 220/60/1 DD
1303250	UX-50BCD 230/50/1 DD
1303251	UX-50BCD 400/50/3N DD

\* Ask for special versions availability

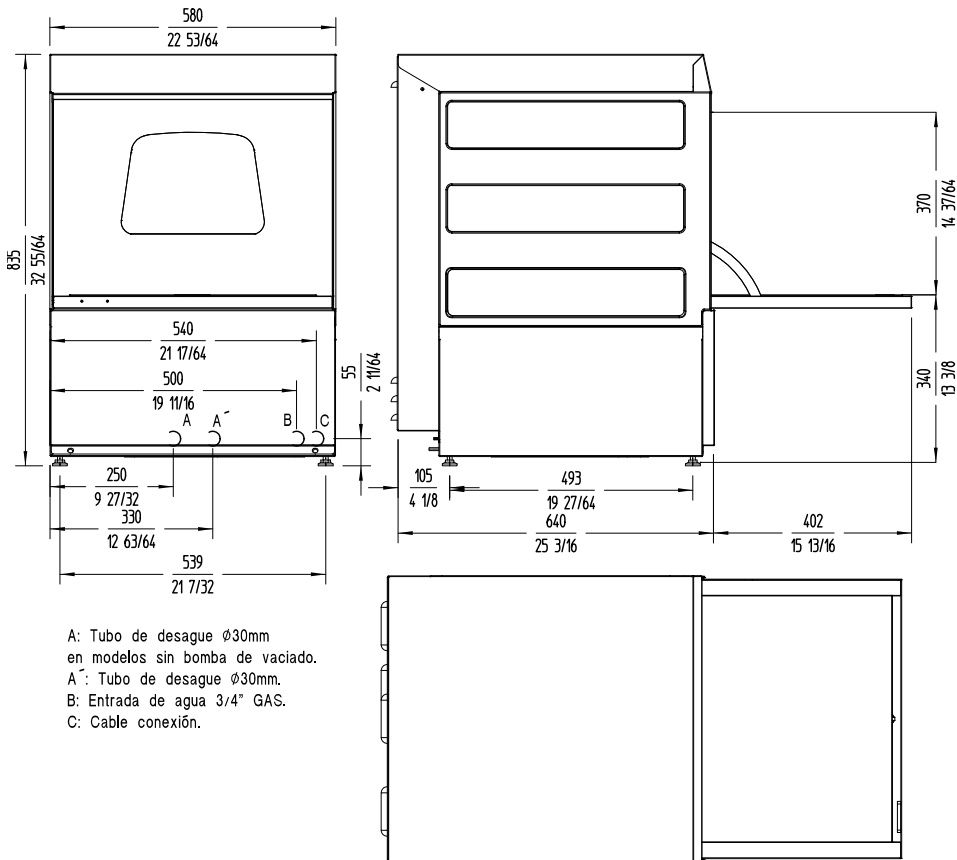

[www.sammic.co.uk](http://www.sammic.co.uk)

Food Service Equipment Manufacturer

Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester

[uksales@sammic.com](mailto:uksales@sammic.com)  
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet  
updated 20/01/2024