DISHWASHER AX-50
Rack size 500 mm x 500 mm and door clearance 380 mm.

WARE WASHING
COMMERCIAL DISHWASHERS

Sales Description

✓ Sani-Control: guaranteed disinfection.

✓ Embedded bodywork and easy-grip door: hygienic and ergonomic.

✓ Exclusive Hydroblade™ washing arms: maximum effectiveness.

✓ 3-stage filtering system.

✓ Double-walled body (partial).

Sani-Control guarantee

✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.

✓ THERMAL LOCK function: ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.

✓ Compact tank volume (50% water saving compared to the previous range).

✓ Embedded basket guides.

Hydroblade™ washing arms

✓ Redesigned nozzles for greater washing performance.

✓ The "monoblock" design delivers durability and resistance to impacts.

✓ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

✓ Keeps the washing water in optimal conditions to maintain constant washing performance.

✓ The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

✓ The integration of the components provides greater resistance and robustness.

✓ Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.

✓ Its ergonomic handle provides a perfect grip, even with wet hands.

✓ Double-walled door with safety microswitch and high quality seal.

✓ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39 cm.

Warewashing, made simple

✓ Active Xperience: simple and intuitive use

✓ Dedicated cycles: selection of the ideal washing programme using icons.

✓ Electronic control panel with IP65 humidity protection.

You will never WASH ALONE

✓ Tech Services: our team of technicians will help you so that your machine is always ready for use.

✓ Design Services: tell us what your needs are and we will advise you.

✓ 60 years of experience and know-how at your disposal.

Includes

✓ Rinse aid pump.
✓ 1 glasses basket.
✓ 1 mixed basket (plates).
✓ 1 small basket for cutlery.

Optional

❏ Detergent dosing kit.
❏ Overflow drainage pump. Tank water renewal by the principle of density.
❏ Double-level accessory for washing two baskets at the same time.

Accessories

❏ Manual water softeners
❏ Automatic water softeners
❏ 500 x 500 mm baskets
❏ Inserts & supplements
❏ High feet kit

❏ Reverse osmosis devices OS-140
❏ Dosing equipments front AX / UX glass- and undercounter dishwashers
❏ Double rack kits for AX/UX

DISHWASHER AX-50
Rack size 500 mm x 500 mm and door clearance 380 mm.

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm
Useful height: 380 mm
Cycle duration: 120 / 150 / 210"
Production baskets / hour: 30 / 24 / 17
Wash temperature: 55ºC - 65ºC
Rinse temperature: 75ºC - 85ºC
✓ Boiler capacity: 4.5 l
✓ Wash tank capacity: 14 l
✓ Water consumption/cycle: 2.7 l
Energy consumption
__Consumption/cycle (kWh): 0,21 kWh
Tank filling consumption (kWh): 0,6 kWh
Loading__
✓ Pump: 500 W / 0.75 Hp
✓ Tank: 1800 W
✓ Boiler: 2800 W
✓ Total loading: 3300 W
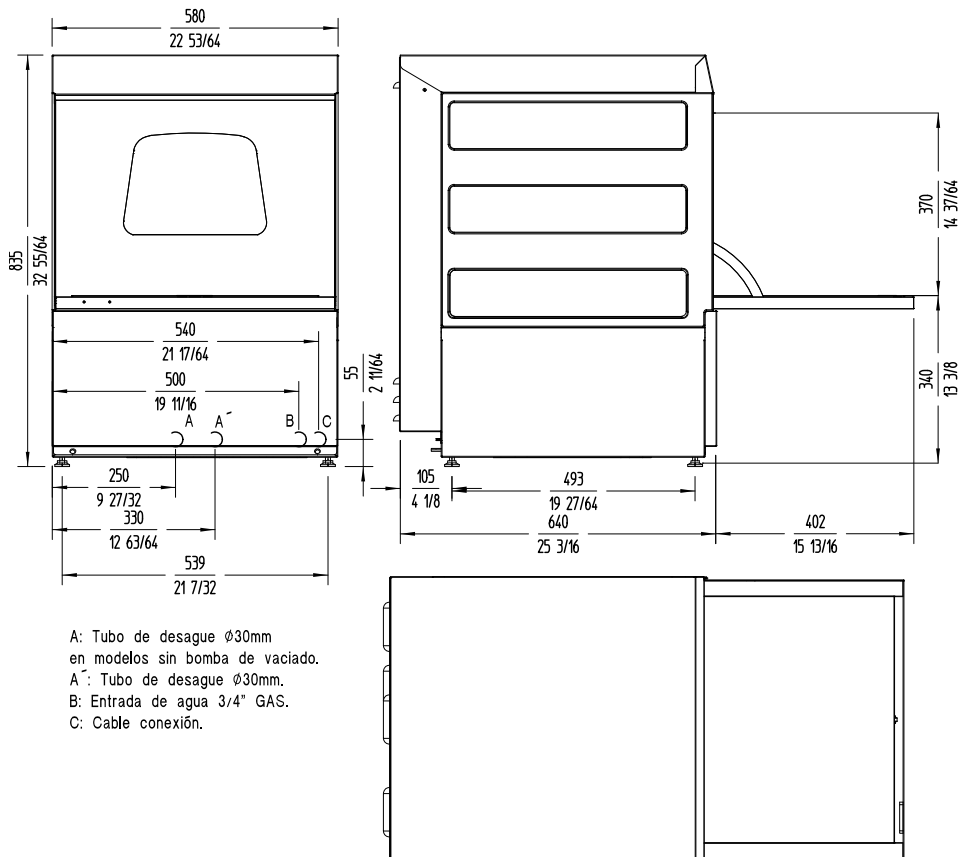
Electrical connection: .
External dimensions (W x D x H)
✓ Width:580 mm
✓ Depth: 640 mm
✓ Height: 835 mm
Noise level (1m.): <70 dB(A)
Crated dimensions
640 x 695 x 960 mm
Gross weight: 62 kg

AVAILABLE MODELS

1303180	AX-50 230/50/1
1303181	AX-50 220/60/1
1303185	AX-50B 230/50/1
1303186	AX-50B 220/60/1
1302386	AX-50 220/60/1 M

* Ask for special versions availability

A: Tubo de desague ∅30mm
en modelos sin bomba de vaciado.
A´: Tubo de desague ∅30mm.
B: Entrada de agua 3/4" GAS.
C: Cable conexión.

Project		Date	
Item		Qty	
Approved			