

IMMERSION CIRCULATOR SMARTVIDE X Maximum capacity: 56 I / 14 gal.

A



SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable.

Interchangeable between °C and °F."

- ✓ Bluetooth / WIFI connectivity.
- ✓ HACCP-ready.

 \checkmark Optional core probe and temperature control by core probe.

- ✓ Firmware update.
- 5" colour touch screen.

Sous-vide cooking, a technique with many advantages

- SmartVide guarantees cooking at a precisely controlled temperature while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- The optional core probe allows for an even more precise control when standardizing recipes. Recipes can be set and the SmartVide controlled by the core probe temperature.
- Allows cooking food in their own juice and using this juice immediately after cooking to enhance flavors.
- ✓ Marinates and macerates an ingredient in half the time.
- ✓ Infuses and flavors oil, fat or other products applying the controlled temperature technique.
- ✓ The possibility of probe activated cycle start is a crucial function for pasteurization.
- \checkmark Increases **profits** due to lack of product shrink
- The possibility of connecting SmartVide X to an **enhanced tank** reduces heating time. This function is specially useful when cooking or retherming very cold or frozen food.



SmartVide X: designed for chefs, developed with chefs

- The thick stainless steel, robust construction guarantees commercial performance.
- Requires very little hands-on time, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest.
- The interactive full-color touchscreen offers all information at a glance and makes operation extremely intuitive. In addition, thanks to the connectivity, an exchange of important data is allowed to improve the performance of the Chef.
- ✓ SmartVide X offers a complete settings menu, accessible through its touch screen.
- ✓ Portable: thanks to their thick, stainless steel, ergonomic handle, SmartVide can be taken from a container to another easily. Additionally, the bag supplied with the circulator allows easy transport - wherever the Chef goes.
- HACCP-ready: thanks to Bluetooth connectivity, it is possible to export or print cooking results at the end of each cycle. Furthermore, the cooking data be consulted on the interactive touch screen at any time during the cycle.
- Your appliance, always updated: free firmware update, no matter where the appliance is with no need of additional appliances.

NCLUDES

- / Janby Track Mini (must be activated).
- ✓ Transport bag.

OPTIONAL

- Core probe.
- Insulated tanks.
- Enhanced tanks.

Accessories

- Needle probe for sous-vide cookers
- Probe foam seal
- Insulated tank for SmartVide immersion circulator
- Lid for SmartVide tanks
- Floating balls for SmartVide

SPECIFICATIONS

Temperature

Display precision: 0.1°F Range: 41°F - 203°F Permissible ambient temperature: 41°F - 104°F

Time

Resolution: 1' Cvcle duration: 1' - 99 h

General features

Maximum recipient capacity: 14 gal Total loading: 2 Hp (120V) / 2.7 Hp (208V)

Submergible part dimensions: 4.6" x 4.3" x 5.8" External dimensions (W x D x H): 4.92" x 5.82" x 15.15"

Net weight: 9.7 lb

Crated dimensions 17.3 x 7.5 x 12.2 "

Lids for insulated tanks.

□ Janby Track (available through

Floating balls.

janby,kitchen).

- SmartVide transport bag
- Smooth bags for sous-vide cooking
- Heated tanks for SmartVide X
- Spacer bases for containers
- Tank dividers

product sheet updated 01/09/25




Maximum capacity: 56 I / 14 gal.

Gross weight: 13.2 lbs.

AVAILABLE MODELS

1180162 SmartVide X 120/60/1

* Ask for special versions availability

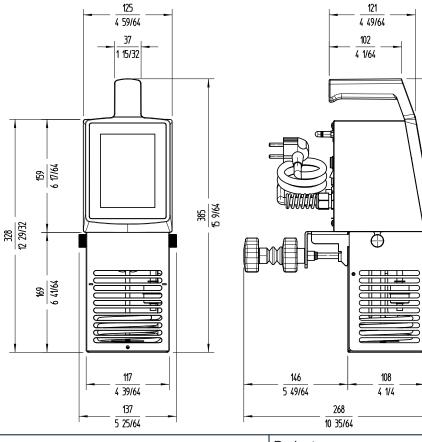

Sammic | www.sammic.us Food Service Equiment Manufacturer

usa@sammic.com 1225 Hartrey Avenue 60202-1056 Evanston, IL phone +1 (224) 307-2232 toll free +1 844 275 3848



Project	Date	et 9/25
Item	Qty	t she 01/0
Approved		oduc odatec

<u>385</u> 15 9/64