# sammic

# **DISHWASHER UX-50C ISO**

Rack size 500x500mm and door clearance 380 mm. Double-skinned construction.



# SALES DESCRIPTION

Sani-Control: guaranteed disinfection

Embedded bodywork and easy-grip door: hygienic and ergonomic

Double-walled body: insulation and energy efficiency Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

## Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- √ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing
- √ WRAS certified.

#### New recessed bodywork

- Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides

#### **Double-Walled (Ultra ISO)**

 Double-Walled Structure: thermo-acoustic insulation to attenuate the sound level and improve energy efficiency

# Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- The "monoblock" design delivers durability and resistance to impacts.
- 30% savings in water consumption during rinsing compared to the previous range





## 3-stage filter system: surface, tank and extraction

- √ Keeps the washing water in optimal conditions to maintain constant washing performance.
- The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.

#### "Easy grip" door: new design with integrated door handle

- The integration of the components provides greater resistance and robustness.
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39.

#### **Premium warewashing**

- √ Ultra Xperience: high performance, without complications.
- Soft start: progressive start-up of the washing pump to protect fracile items.
- Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- Dedicated cycles: selection of the ideal washing programme using icons.
- Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance.
- ✓ Control panel with IP65 humidity protection.

#### You will never WASH ALONE

- Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

# INCLUDES

- √ 1 glasses basket.
- √ 1 mixed basket (plates).
- √ 1 small basket for cutlery.
- Drainage pump with level sensor. Proactive tank water renewal.

# **O**PTIONAL

- Detergent dosing kit.
- Automatic resin regeneration water softener with salt detector.
- Double-level accessory for washing two baskets at the same time.

# **Accessories**

- Manual water softeners
- Automatic water softeners
- ☐ 500 x 500 mm baskets
- ☐ Inserts & supplements
- ☐ High feet kit☐ Reverse osmosis devices
- OS-140
- Dosing equipments front AX
   / UX glass- and undercounter dishwashers
- ☐ Stands for dishswashers 500x500mm
- Double rack kits for AX/UX

# **SPECIFICATIONS**

Basket dimensions: 500 mm x 500 mm Useful height: 380 mm

Cycle duration: 90/110/120/180/240" Production baskets / hour: 40/33/30/20/15



# **DISHWASHER UX-50C ISO**

Rack size 500x500mm and door clearance 380 mm. Double-skinned construction.

Wash temperature:  $55^{\circ}$ C -  $65^{\circ}$ C Rinse temperature:  $65^{\circ}$ C -  $87^{\circ}$ C

Wash tank capacity: 14 I

## Consumption and savings

Automatic saving mode in: 25' Automatic switch-off: 120'

## Loading


Pump: 750 W / 1 Hp

# External dimensions (W x D x H)

Net weight: 72 kg

# **AVAILABLE MODELS**

-----

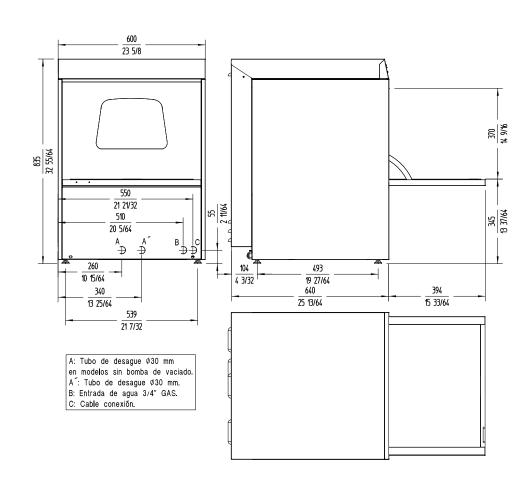



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



	Project	Date
	Item	Qty

Approved

<sup>\*</sup> Ask for special versions availability