



DISHWASHER UX-50C ISO

Rack size 500x500mm and door clearance 380 mm. Double-skinned construction.



WARE WASHING
COMMERCIAL DISHWASHERS



SALES DESCRIPTION

Sani-Control: guaranteed disinfection.
Embedded bodywork and easy-grip door: hygienic and ergonomic.
Double-walled body: insulation and energy efficiency.
Exclusive Hydroblade™ washing arms: maximum effectiveness.
3-stage filtering system.

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing.
- ✓ WRAS certified.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides.

Double-Walled (Ultra ISO)

- ✓ Double-walled structure: thermo-acoustic insulation to attenuate the sound level and improve energy efficiency.

Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.
- ✓ The surface filters feature an “easy-on” design and can be quickly removed without having to disconnect the washing arms.

“Easy grip” door: new design with integrated door handle

- ✓ The integration of the components provides greater resistance and robustness.
- ✓ Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal.
- ✓ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39 cm.

Premium warewashing

- ✓ Ultra Xperience: high performance, without complications.
- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY.
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance.
- ✓ Control panel with IP65 humidity protection.

You will never WASH ALONE

- ✓ Tech Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

INCLUDES

- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 small basket for cutlery.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.

OPTIONAL

- ☐ Detergent dosing kit.
- ☐ Automatic resin regeneration water softener with salt detector.
- ☐ Double-level accessory for washing two baskets at the same time.

ACCESSORIES

- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ 500 x 500 mm baskets
- ☐ Inserts & supplements
- ☐ High feet kit
- ☐ Reverse osmosis devices
- OS-140
- ☐ Dosing equipments front AX / UX glass- and undercounter dishwashers
- ☐ Stand for 500 x 500 mm dishwashers
- ☐ Double rack kits for AX/UX

SPECIFICATIONS



product sheet
updated 13/03/2025

DISHWASHER UX-50C ISO

Rack size 500x500mm and door clearance 380 mm. Double-skinned construction.



Basket dimensions: 500 mm x 500 mm

Useful height: 380 mm

Cycle duration: 90 / 110 / 120 / 180 / 240"

Production baskets / hour: 40 / 33 / 30 / 20 / 15

Wash temperature: 55°C - 65°C

Rinse temperature: 65°C - 87°C

Boiler capacity: [v:capa_boiler]

Wash tank capacity: 15 l

Consumption and savings

Water consumption/cycle: [v:cons_ciclo]

Automatic saving mode in: 25'

Automatic switch-off: 120'

Energy consumption

Water consumption/cycle (kWh): 0,19 kWh

Tank filling consumption (kWh): 0,6 kWh

Loading__

Pump: 750 W / 1 Hp

Tank: 1800 W

Boiler: [v:pot_cald_mono] (single phase) / [v:pot_cald_mp] (multipower)

Total loading: 5700 W (single phase) / [v:pot_mp] (multipower)

External dimensions (W x D x H)

- ✓ Width:[v:dim_ext_anch]


- ✓ Depth: [v:dim_ext_fondo]

- ✓ Height: [v:dim_ext_alto]

Noise level (1m.): [v:nivel_ruido]

AVAILABLE MODELS

* Ask for special versions availability

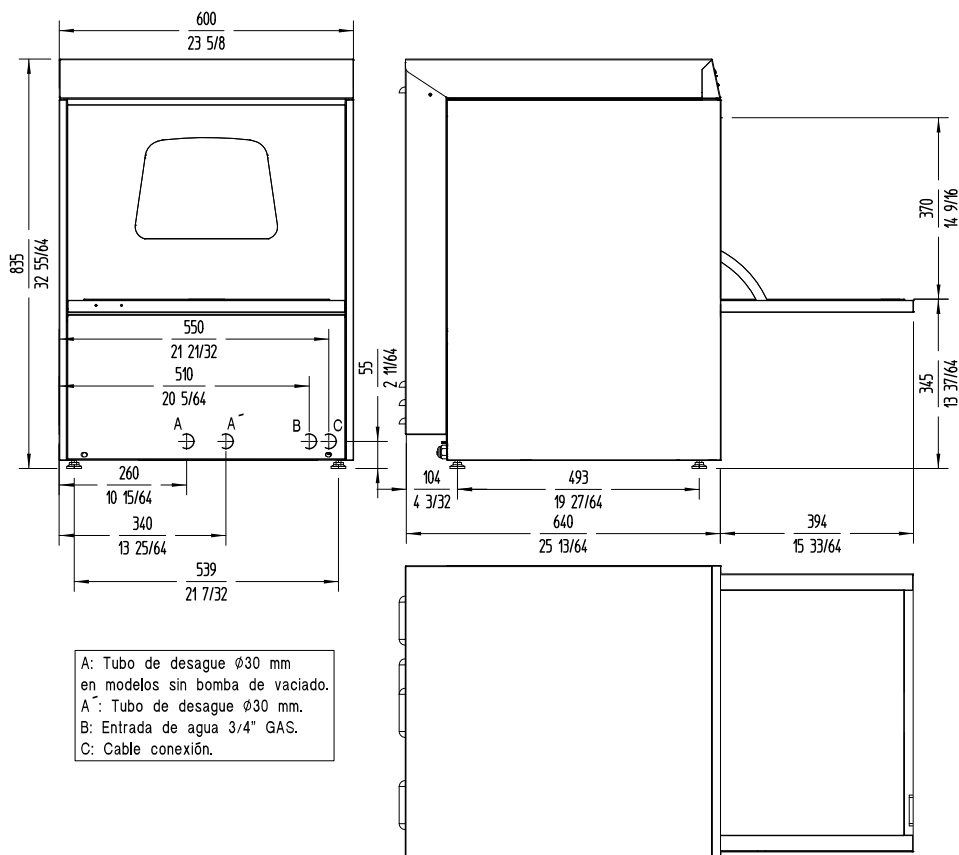

A: Tubo de desagüe Ø30 mm
en modelos sin bomba de vaciado.
A': Tubo de desagüe Ø30 mm.
B: Entrada de agua 3/4" GAS.
C: Cable conexión.



 **sammic** | sammic.asia
Food Service Equipment Manufacturer

asia@sammic.com
phone: +65 67480511
3018 Ubi Road 1
408710 SINGAPORE

vietnam@sammic.com
phone: +84 (0) 862493814

thailand@sammic.com
phone: +66 (0) 993425561



Project

Date

Item	Value
1	10
2	20
3	30
4	40
5	50
6	60
7	70
8	80
9	90
10	100

Qty

Approved

WARE WASHING
COMMERCIAL DISHWASHERS

product sheet
updated 13/03/2025