GLASSWASHER AX-40 Rack size 400 mm x 400 mm and door clearance 300 mm.



SALES DESCRIPTION

✓ Sani-Control: guaranteed disinfection.

✓ Embedded bodywork and easy-grip door: hygienic and ergonomic.

✓ Exclusive Hydroblade[™] washing arms: maximum effectiveness.

- ✓ 3-stage filtering system.
- ✓ Double-walled body (partial).

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).
- Embedded basket guides.

Hydroblade[™] washing arms

- Redesigned nozzles for greater washing performance.
 The "manaphask" design delivers durability and resistance
- ✓ The "monoblock" design delivers durability and resistance to impacts.
- $\scriptstyle \prime$ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- Keeps the washing water in optimal conditions to maintain constant washing performance.
- The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.





- \checkmark Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ 300 mm load capacity: high versatility for washing a wide range of glasses and even medium-sized dishes.
- Double-walled door with safety microswitch and high quality seal.

Warewashing, made simple

- Active Xperience: simple and intuitive use.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- \checkmark Electronic control panel with IP65 humidity protection.

You will never WASH ALONE

- ✓ Tech Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- \checkmark 60 years of experience and know-how at your disposal.

NCLUDES

- ✓ Rinse aid pump.
- ✓ 1 glasses basket.
- ✓ 1 small basket for cutlery.

OPTIONAL

- Detergent dosing kit.
- Overflow drainage pump. Tank water renewal by the principle of density.
- Double-level accessory for washing two baskets at the same time.

1 mixed basket (plates).

Accessories

- Manual water softeners
- Automatic water softeners
- 400 x 400 mm baskets
- □ Inserts & supplements
- High feet kit
- Reverse osmosis devices
- OS-140

 Dosing equipments front AX
 UX class, and undercounted
- / UX glass- and undercounter dishwashers
- Double rack kits for AX/UX



GLASSWASHER AX-40 Rack size 400 mm x 400 mm and door clearance 300 mm.

SPECIFICATIONS

Basket dimensions: 400 mm x 400 mm Useful height: 300 mm Cycle duration: 120 / 150 / 210" (Optional: 90 / 120 / 180") Production baskets / hour: 30 / 24 / 17 (Optional: 40 / 30 / 20) Boiler capacity: 3.2 I Wash tank capacity: 9 I Water consumption/cycle: 2.2 I **Energy consumption**

- Consumption/cycle (kWh): 0,17 kWh
- ✓ Tank filling consumption: 0,39 kWh

Loading

- ✓ Pump: 250 W / 0.33 Hp
- ✓ Tank: 1200 W
- ✓ Boiler: 2500 W
- ✓ Total loading: 2750 W

Electrical connection: .


External dimensions (W x D x H)

- ✓ Width:470 mm ✓ Depth: 537 mm
- ✓ Height: 710 mm
- Noise level (1m.): <69 dB(A) Crated dimensions 525 x 615 x 820 mm

AVAILABLE MODELS

1303080	AX-40 230/50/1
1303081	AX-40 220/60/1
1303087	AX-40B 230/50/1
1303088	AX-40B 220/60/1

* Ask for special versions availability

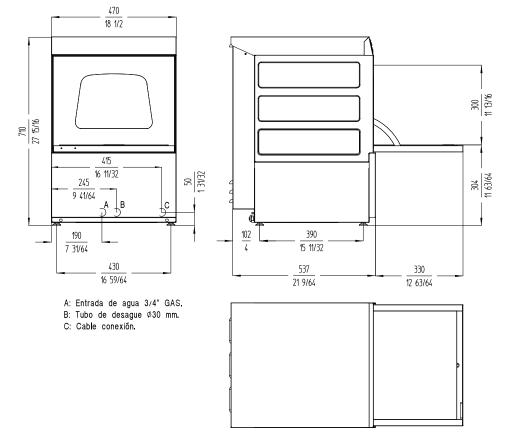

Sammic | sammic.com Food Service Equiment Manufacturer

Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty
Approved	